



HALSPAN



Halspan® Fixed Triple Threshold Plate Accompaniment To Acoustic Seals




The **Halspan Fixed Triple Threshold Plate** is a low profile threshold plate and provides a perfect accompaniment to acoustic seals, which ultimately leads to greater sound reduction. This product is made from durable T6060 grade aluminium and anodised to the highest standard.



Product Codes & Specification

Product Code: SLS-DRP-113 (1000m long) / SLS-DRP-114 (2100mm long)


Design Guide

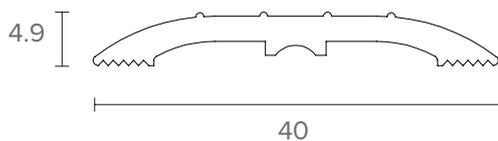

Specification

- Application: At the threshold of doorsets
- Bonded with adhesive (not supplied) or screw-fixed
- Performance: Complies to Approved Document M. AA10 finish
- Material: Aluminium
- Size: 4.9mm (H), 40mm (W), 1000/2100mm (L)
- Colour: Satin Silver

Fitting Instructions

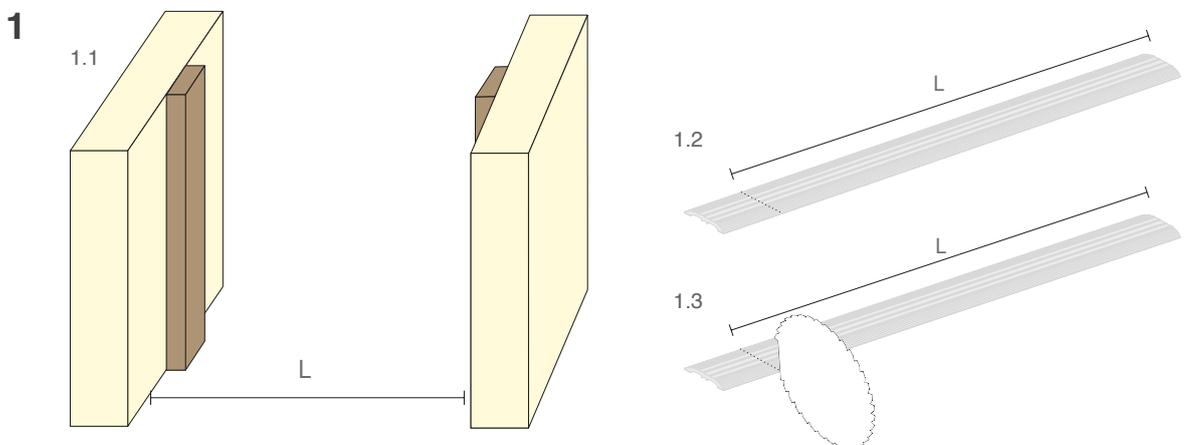


- 1.1 Measure the between door jambs (L)
- 1.2 Measure the threshold plate and accurately mark for cutting
- 1.3 Machine cut the threshold plate to required length

Halspan® Fixed Triple Threshold Plate Accompaniment To Acoustic Seals




2

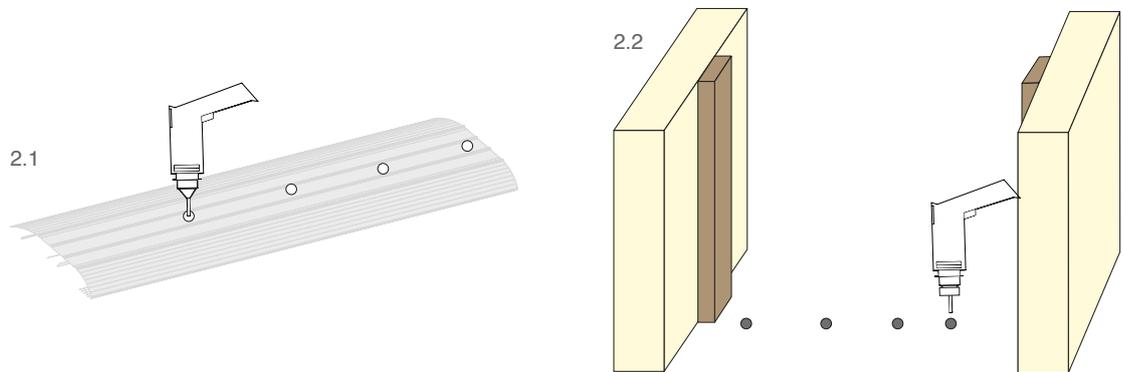

- 2.1** To screw fix. Firstly using a 4mm drill bit, drill holes 200mm apart along the threshold plate ensuring to countersink each hole.
- 2.2** If fixing to a concrete floor, place threshold in position and mark floor through holes in threshold plate, remove threshold and drill floor using 6mm masonry drill bit.

3


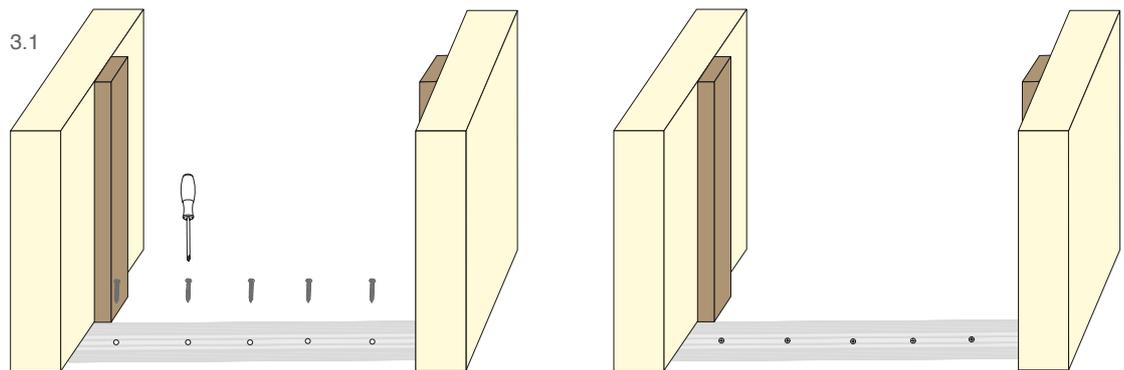


- 3.1** Place threshold in position and using the screws and plugs provided screw the threshold into place ensuring the screws are flush with the threshold.

Halspan® Fixed Triple Threshold Plate Accompaniment To Acoustic Seals



4

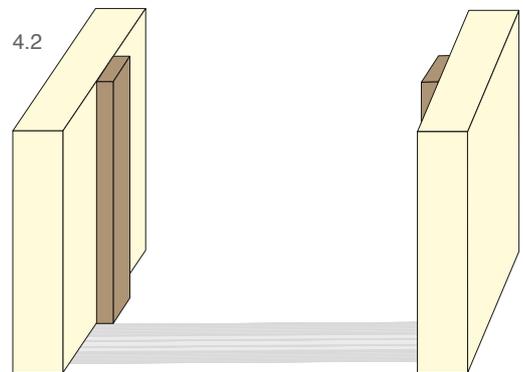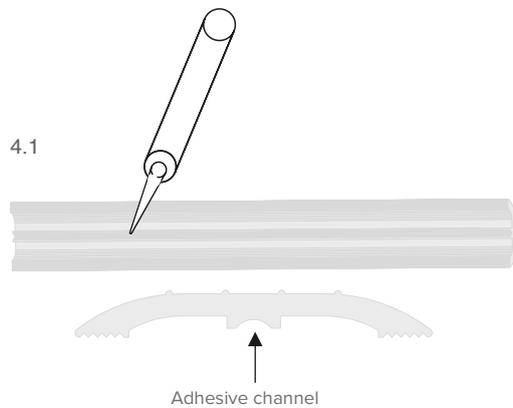

- 4.1** If adhesive fix is required run a bead of intumescent mastic along the whole length of the threshold plate in the channel on the underside of the threshold.
- 4.2** Place in position and allow to dry.

5

