



HALSPAN®



Halspan® ML600-DBL/DBM: Double Slimline Mini Magnet 280Kg Holding Force x2



Halspan® ML600-D: Double Slimline Mini Magnet is a slimline mini magnet product offering 600lbs (280kg) x2 holding force. For use with most access control / entry systems. Monitored and unmonitored versions available.



Fire

**Tested and certified
in accordance with:**

BS EN 1634-1 & BS 476: Part 22



Product Codes & Specifications

Specification

- Magnet size 500mm (L) x 42mm (W) x 25mm (D)
- 12/24 VDC @480/240mA
- 280kg (600lbs) holding force x2
- Built in surge protection
- Fail safe operation (power to lock)
- +/- 15% voltage tolerance
- Push off release pin on armature
- Clean and compact design in aluminium
- Slim line mini magnet
- LED indication (Unmonitored, red; Monitored, red to green)
- No residual magnetism
- Content includes: armature plates, fixings kits, instructions and armature fixing template


Product Codes

Product Name	Product Code	Image
Halspan® ML600-DBL/DBM: Double Slimline Mini Magnet - Unmonitored	MLK-600-DBL	
Halspan® ML600-DBL/DBM: Double Slimline Mini Magnet - Monitored	MLK-600-DBM	

Halspan® ML600-DBL/DBM: Double Slimline Mini Magnet 280Kg Holding Force x2



Design Guide

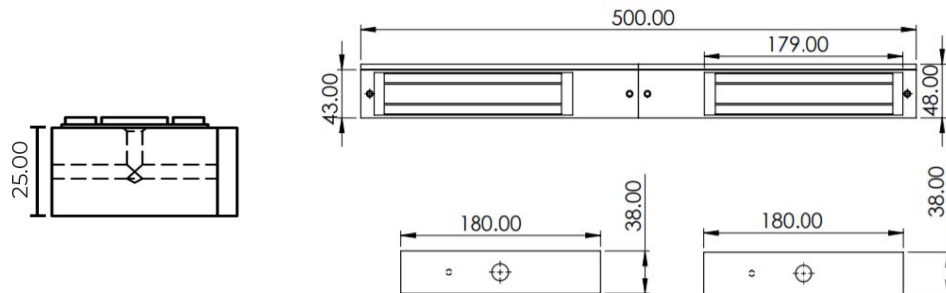

General Notes

Supporting Certification & Test Data

Certification - Fire

- Warringtonfire Halspan Optima 30 Field of Application Report Chilt/A01204 Part 1
- Warringtonfire Halspan Optima 60 Field of Application Report Chilt/A01205 Part 1
- Warringtonfire Halspan Optima 60 Field of Application Report Chilt/A01205 Part 2
- Warringtonfire Halspan Prima 30 Field of Application Report FEA/F97174 Part 4
- Warringtonfire Halspan Prima 60 Field of Application Report FEA/F96103 Part 1
- Warringtonfire Halspan Prima 60 Field of Application Report FEA/F96103 Part 2
- Warringtonfire Halspan Prima 60 Field of Application Report FEA/F96103 Part 3
- Warringtonfire Halspan Prima 60 Field of Application Report FEA/F96103 Part 4
- Warringtonfire Halspan XT & IT 30 Field of Application Report Chilt/A13242
- Warringtonfire Halspan XT & IT 60 Field of Application Report Chilt/A13227

The information in this datasheet is correct at time of going to press. However our designs, specifications and certifications may change in the interest of product development following publication. If you would like to make a query about any of the details in this document, please contact Halspan via our website, or call our office in the UK on +44 (0)3300 563836.

