



Codelocks CL5010 Heavy Duty Electronic Tubular Mortice Latch

Fire Rated Electronic Lock



The Codelocks CL5010 Heavy Duty Electronic Tubular Mortice Latch for use in high traffic applications. Particularly suitable for use in health, educational, commercial and residential environments. The CL5010 has a conventional 3x4 button keypad layout for instant familiarity, providing quick programming with multiple ranges of functions. Suitable for internal and external use, fire rated up to 60 minutes.



Fire

Tested in Accordance with:

BS EN 1634-1:2008 when installed with PKFPv2 fire kit. 30/60 minute.



Product Codes & Specification

Master Product code: LCK-CL5010-BS

Codelocks electronic locks are highly developed, factory tested machines designed to meet the latest product performance standards. Once correctly installed, the unit should require no further maintenance or adjustment, unless other factors change.

Specification

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none">• Key override and front cylinder change• Suitable for wooden doors between 35mm - 60mm thick• PVD low maintenance finish• User Codes 4, 5 or 6 digits long• Allows up to 10 one time User Codes• Suitable for internal and external use• Up to 200,000 operations from 4 x AA batteries (supplied)• Stores up to 80 User codes• Remote release connections | <ul style="list-style-type: none">• Suitable for internal and external use• Tamper time out and low battery warning• Locked and unlocked LED indicator option• Suitable for left hand or right hand hung doors• Fire rated for 60 minute fire doors when ordered as a kit. Pack contains shaped pads of intumescent strips and tubes.• Backset : 60mm• Two year guarantee |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


Codelocks CL5010 Heavy Duty Electronic Tubular Mortice Latch

Fire Rated Electronic Lock



| Product Codes | | | |
|------------------------------------------------------------------------------------------------|---------------|-------------------|-------|
| Product name | Colour | Product Code | Image |
| Codelocks Heavy Duty Electronic Tubular Mortice Latch PVD B/Steel | Brushed steel | LCK-CL5010-BS | |
| Codelocks Heavy Duty Electronic Tubular Mortice Latch PVD B/Steel with Fire Kit Pack 60 minute | Brushed steel | BOM-LCK-CL5010-BS | |

Design Guide

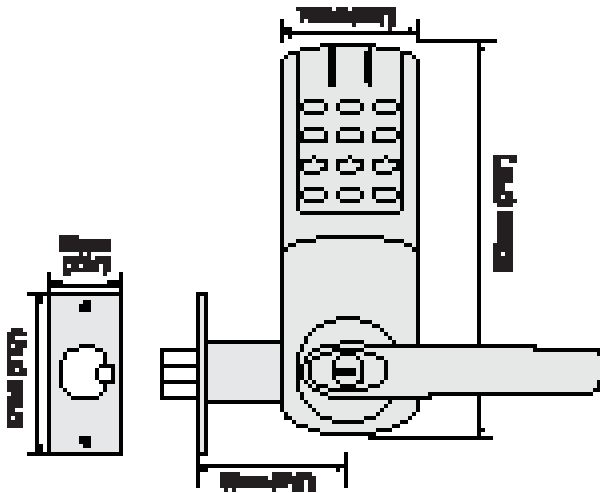

General Maintenance & Operational Notes

- No maintenance of the working parts is necessary.
- DO NOT OIL. To maintain the finish the lock should be cleaned regularly with a soft cloth.
- A silicone spray or similar should be used to provide a protective film against grit and grime.

The information in this datasheet is correct at time of going to press however our designs, specifications and certifications may change in the interest of product development following publication. If you would like to make a query about any of the details in this document, please contact Halspan via our website, or call our office in the UK on +44 (0)3300 563836.

