



HALSPAN®



Halspan® Radius Flush Bolt

Lever Action Flush Bolt

Halspan® Radius Flush Bolt have been specifically tested by Halspan in our FD30 and FD60 door cores along with our intumescent kits to ensure compliance. Tested to 200,000 cycles, they offer durability, strength and ease of use.



Fire

Tested in Accordance with:

BS EN 1634-1 and BS 476 part 22




Product Codes & Specification

Specification

- 11 Diameter bolt
- 15mm adjustable bolt throw
- Material: 304 grade Stainless Steel
- 10 year mechanical guarantee

Design Guide

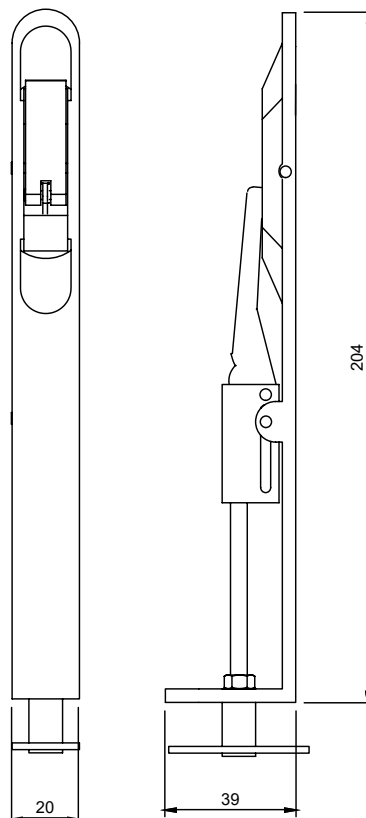

Halspan® Radius Flush Bolt

Lever Action Flush Bolt



Halspan Radius Flush Bolt

Product Name	Halspan NFR Radius Flush Bolt 203mm x 19mm	
Master Code	BLT-FLS-203	Finish
Product Codes	BLT-FLS-203-BSS	● Brushed Stainless Steel
	BLT-FLS-203-PSS	● Polished Stainless Steel



Halspan 30 Radius Flush Bolt

Product Name	Halspan 30 Radius Flush Bolt 203mm x 19mm. Includes Intumescent protection	
Master Code	BOM-BLT-030	Finish
Product Codes	BOM-BLT-030-BSS	● Brushed Stainless Steel
	BOM-BLT-030-PSS	● Polished Stainless Steel



Halspan 60 Radius Flush Bolt

Product Name	Halspan 60 Radius Flush Bolt 203mm x 19mm Includes Intumescent protection	
Master Code	BOM-BLT-060	Finish
Product Codes	BOM-BLT-060-BSS	● Brushed Stainless Steel
	BOM-BLT-060-PSS	● Polished Stainless Steel





General Maintenance & Operational Notes

- All external and exposed surfaces require regular / weekly cleaning with a soft cloth, using warm water and mild detergent to remove built up dirt.
- For persistent stains and marks use a soft cloth, sponge or brush with a small amount of household, detergent-free mild abrasive.
- Surface oxidation can appear as a result of contaminants. It is recommended to clean with a cloth and warm water, before cleaning with stainless steel cleaner.
- After each and every clean, wipe down products with a separate clean dry cloth.
- The use of steel wool and steel brushes can leave particles in surfaces leading to rust, and should therefore be avoided.
- All locks should be maintained on a regular basis and it is recommended that a log of bi-annual inspections is kept and maintained. Maintenance checks should include suitable functional tests inclusive of all fitted accessories (dependant on lock type and function) and suitable visual inspection.
- It is recommended that routine cleaning is undertaken on a monthly basis. In areas of extreme environment or contaminants, this should be increased accordingly.
- As a prerequisite of compliance, it is recommended to keep a log of the adopted maintenance schedule for each installation.

The information in this brochure is correct at time of going to press however our designs, specifications and certifications may change in the interest of product development following publication. If you would like to make a query about any of the details in this document, please contact Halspan via our website, or call our office in the UK on +44 (0)3300 563836.